



HAL
open science

Thermal heating during microwave processing for cerium oxide particles packing: multiphysics modelling approach. Study of the effect of particle and neck sizes

Hussein Hammoud, François Valdivieso, Sébastien Vaucher

► To cite this version:

Hussein Hammoud, François Valdivieso, Sébastien Vaucher. Thermal heating during microwave processing for cerium oxide particles packing: multiphysics modelling approach. Study of the effect of particle and neck sizes. International Conference on Numerical Electromagnetic Modeling and Optimization for RF, Microwave, and Terahertz Applications (NEMO), Aug 2015, Ottawa, Canada. 10.1109/NEMO.2015.7415042 . emse-01526904

HAL Id: emse-01526904

<https://hal-emse.ccsd.cnrs.fr/emse-01526904>

Submitted on 27 Aug 2021

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



Distributed under a Creative Commons Attribution| 4.0 International License

Thermal heating during microwave processing for cerium oxide particles packing: multiphysics modelling approach. Study of the effect of particle and neck sizes

Hussein Hammoud^{a,b}, François Valdivieso^a, Sébastien Vaucher^b

^aLaboratoire Georges Friedel CNRS UMR 5307, St-Etienne, France

^bSwiss Federal Laboratories for Materials Science and Technology (EMPA), Thun, Switzerland

Abstract: In this work a single mode resonant microwave cavity (2.45 GHz) is loaded with spherical particles. A weakly coupled Electromagnetic-Thermal (EM-thermal) solver is used iteratively to determine how the microscopic geometry (local curvatures between the particles, grain size and neck size) modifies the electromagnetic field, and in turn the thermal field in the particles. The modelling is performed with the conformal Finite Element (FE) solver COMSOL Multiphysics. The dielectric and the thermal properties of cerium oxide (ceria) particles up to 1000°C have been determined in our previous study [1].

The main variables in this study are:

- 1- The radius of the spherical ceria particle [R, 3*R, 5*R].
- 2- The size of the neck between two particles [X/R= 0.1, 0.15, 0.2].

Keywords: EM-Thermal simulation, Cerium oxide, Microwave Processing, Effect of Neck Size.

Introduction

The microwave technology is one of the best candidates to improve the sintering of materials produced by powder technology. It enables a rapid, selective and volumetric heating of the green bodies, that can be beneficial to the mechanical and physical properties of the final sintered parts [2, 3]. Despite numerous efforts it remains unclear today how the local electromagnetic and thermal field gradients can influence the mass transfer mechanisms involved during sintering such as grain boundary diffusion and surface diffusion.

Moreover the microwave technology has been used in the mechanism of the selective and rapid heating of many materials. It is also known that ceramic sintering is one of the biggest areas of microwave applications [4].

Ceria or cerium dioxide (CeO₂) ceramic material has important uses, such as UV filters, electrolytes in SOFC (solid oxide fuel cell) technology and as non-radioactive uranium dioxide simulant, can be extensively studied for the nuclear waste recycling technology [5,6].

Today, the advancements in numerical techniques and development of practical software stimulate the interest in modeling of the microwave and RF processes, especially for the systems which have multiphysics problems (thermal, mechanical and electromagnetic aspects) [7]. Hence, we present here the results of EM and thermal microwave heating in single mode applicator at 2.45 GHz using the FE solver COMSOL Multiphysics. This study will give the information needed for our experimental study and will be compared to it in our next work.

Model and material parameters

We present a model of a single mode standard cavity of 86 x 43 mm which was developed recently in our laboratory (Mines Saint-Etienne). The waveguide has a length of 260 mm and electromagnetic waves in rectangular TE₁₀ mode at 2.45 GHz. The microwave input power was

fixed at 1 KW and the spherical ceria sample was placed in an intense electric field position in an alumina crucible which is known as the best way to guarantee an efficient microwave heating. The crucible properties were imposed as in case of microwave-transparent materials in order to avoid the perturbation of the electromagnetic behavior of the sample. A rectangular iris has an opening of 65 mm and is located between the port excitation of the waves and the sample position. The presence of the iris was necessary in order to reflect the backward waves to get the resonance which means that the electromagnetic energy increases because of the multi-reflected radiation in the cavity. This phenomenon of resonance introduces stationary medium of microwaves radiation. Moreover, the size and the position of the iris were optimized in experimental and simulation studies which are not included in this paper.

The simulation process can be described as an iterative process where the multiphysics problem follows the different steps mentioned in below:

First, an electromagnetic stationary calculation was made everywhere in the cavity and within the sample taking into account the dielectric properties of the sample and the boundary conditions of the cavity walls to provide the energy absorbed. Then, the energy absorbed by the sample was served as a local heat source. The different losses coming from the radiation of the sample surface and the heat flow assumed for the air were also included in the calculation in a time domain whereas the electromagnetic .study was in frequency domain. The cavity walls were perfectly conducting.

The different thermal and dielectric parameters up to 1000°C of the ceria sample were calculated in previous study [1].

The relative permittivity) and the thermal parameters of the sample as function of temperature are given in the table 1 below:

<p style="text-align: center;">Relative permittivity</p> $7.9519 + 0.0087 * T - j * (1.4354E^{-14} * T^5 - 4.4388E^{-11} * T^4 + 5.2856E^{-8} * T^3 - 2.9991E^{-5} * T^2 + 8.0780E^{-3} * T - 0.8058)$	<p style="text-align: center;">Specific heat capacity</p> $5.421E^{-7} * T^3 - 1.4389E^{-3} T^2 + 1.2612 * T + 62.208$ <p style="text-align: center;">(J/Kg.K)</p>
<p style="text-align: center;">Emissivity</p> $3.4080E^{-7} * T^2 - 1.2404E^{-3} * T + 1.432$	<p style="text-align: center;">Thermal conductivity</p> $-1.157 * \log(T) + 8.7001 \text{ (W/m.K)}$

Table 1: Thermal and dielectric parameters of ceria

Results

We present in this section the results obtained for different radius of the spherical sample as well as for different neck size between two samples.

Firstly, the figures 1a), b), c) show the variation of electric field for 3 different radii of the spherical sample (1, 3 and 5 mm). Then, in the figures 1d), e), f) we present the distribution of the temperature for it. From the figure 1, we can easily see that when the size of the particle increases the temperature increases rapidly from 438 °C to 1127°C and the electric field is slightly dependant on the size as well (see figures 1a) to 1c)).

Secondly, the figures 2a), b) and c) for 3 different neck size (X/R=0.1, 0.15, 0.2) between 2 particles when their radius was fixed at 5 mm. The figure 2 shows that the effect of the neck size is negligible on the heating behaviour whereas the maximum temperature is lower compared to one sphere (761 to 764 °C). This difference can be explained by the different position of the sample; in case of 2 spheres the neck was placed in an intense position of the electric field when

in the previous case the center of the sample was placed in this position. A temperature gradient was observed between the core and the surface of the sample as well as its core and its neck.

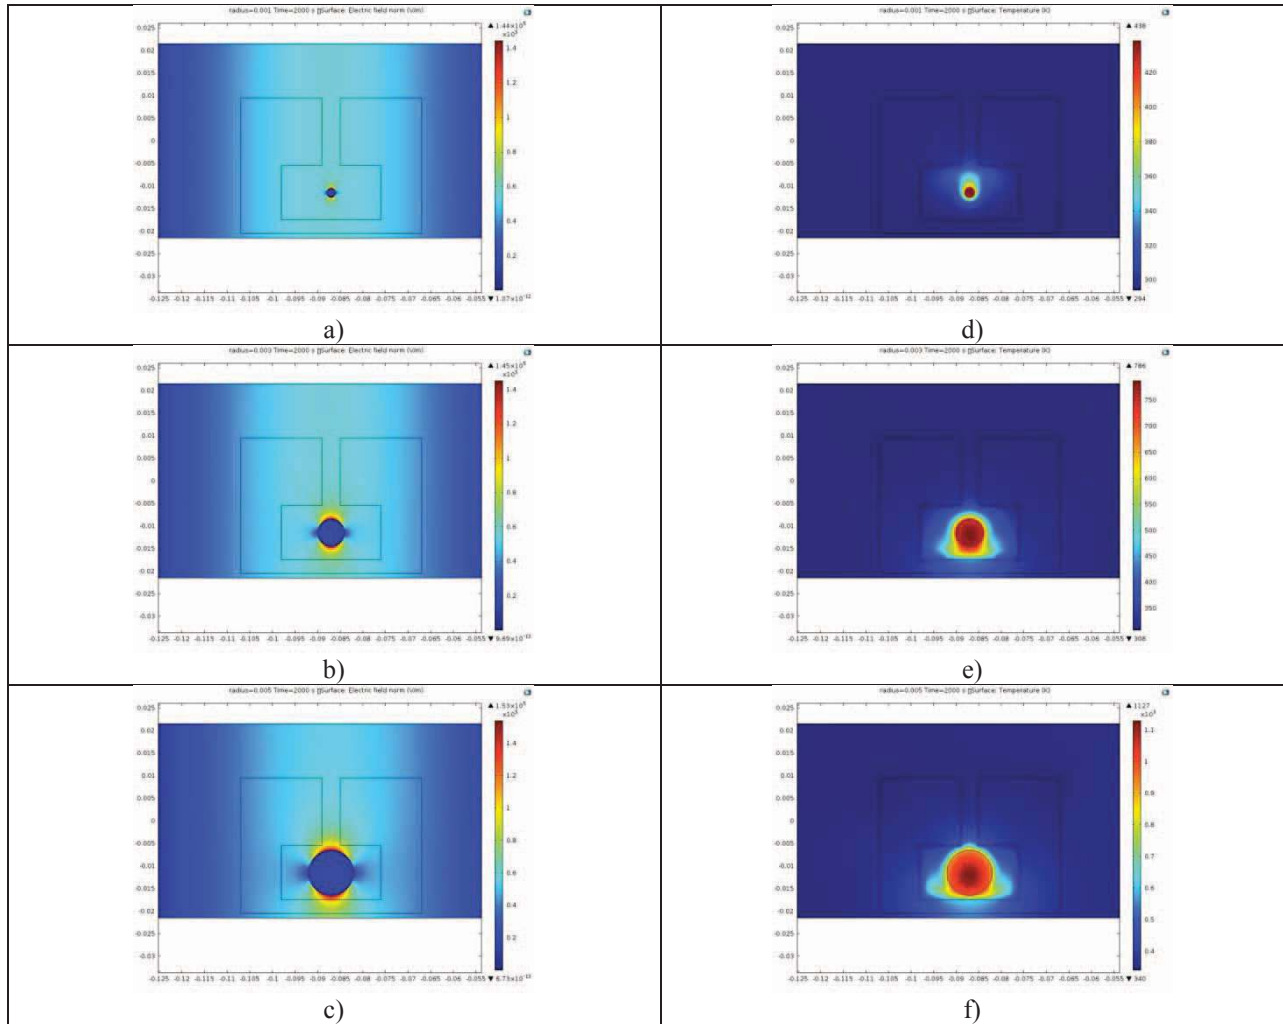


Fig. 1. Variation of the electric field norm for different radii a) 1, b) 3 and c) 5 mm and temperature distributions of ceria sphere for different radii: d) 1, e) 3 and f) 5 mm.

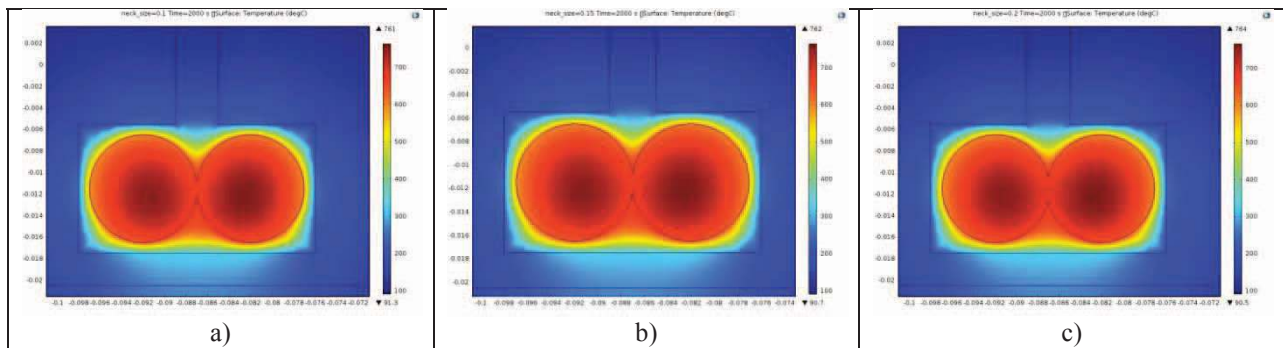


Fig. 2. Temperature distributions of ceria spheres for different neck size: a) 0.1, b) 0.15 and c) 0.2.

Conclusion

The results show that the size of 1 particle has a strong effect on the electric field and therefore on the microwave heating behaviour (the temperature varies from 438 to 1127 °C) whereas the effect of neck size on the heating is negligible. Moreover, the existence of large temperature gradients (about 150 to 200 °C) can be a driving force for sintering.

References

- [1] H.Hammoud, S. Vaucher and F. Valdivieso, Effect of the porosity on the thermophysical properties of cerium oxide up to 1300K and their implications for microwave sintering of spherical ceria gels, AMPERE 2013 the 14th International Conference on Microwave and High Frequency Heating, Nottingham,UK.
- [2] P. Yadoji, R. Peelamedu, D. Agrawal, R. Roy, Microwave sintering of Ni-Zn ferrites: comparison with conventional sintering, *Materials Science and Engineering B* 98 269–278 (2003).
- [3] D. Agrawal, Microwave sintering of ceramics, composites, metals, and transparent materials, *Journal of Materials Education* 19 49–58 (1999).
- [4] W. H. Sutton, Microwave processing of ceramic materials, *Am. Ceram. Soc.* 68 [2] 376–86 (1989).
- [5] M. Jalilpour and M. Fathalilou, Effect of aging time and calcination temperature on the cerium oxide nanoparticles synthesis via reverse co-precipitation method, *International J. of the Physical Sciences*, Vol.7(6), 944-948 (2012).
- [6] Fundamentals of the behavior of fission products in oxide nuclear fuels, University of Oxford.
- [7] D. Bouvard et al., Multiphysics Simulation of Microwave Sintering in a Monomode Cavity, 12th Seminar Computer Modeling in Microwave Engineering & Applications, Grenoble, France, 2010.