



Recent changes in the Building Topology Ontology

Mads Holten Rasmussen, Pieter Pauwels, Maxime Lefrançois, Georg Ferdinand Schneider, Christian Anker Hviid, Jan Karlshøj

► To cite this version:

Mads Holten Rasmussen, Pieter Pauwels, Maxime Lefrançois, Georg Ferdinand Schneider, Christian Anker Hviid, et al.. Recent changes in the Building Topology Ontology. LDAC2017 - 5th Linked Data in Architecture and Construction Workshop, Nov 2017, Dijon, France. emse-01638305

HAL Id: emse-01638305

<https://hal-emse.ccsd.cnrs.fr/emse-01638305>

Submitted on 20 Nov 2017

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

Recent changes in the Building Topology Ontology

Mads Holten Rasmussen¹, Pieter Pauwels², Maxime Lefrançois³, Georg Ferdinand Schneider⁴, Christian Anker Hviid¹, and Jan Karlshøj¹

¹ Technical University of Denmark, Copenhagen, Denmark

² Ghent University, Ghent, Belgium

³ Univ Lyon, MINES Saint-Étienne, Laboratoire Hubert Curien UMR 5516, France

⁴ Fraunhofer Institute for Building Physics IBP, Nuremberg, Germany

Abstract. The Building Topology Ontology (BOT) was in early 2017 suggested to the W3C community group for Linked Building Data as a simple ontology covering the core concepts of a building. Since it was first announced it has been extended to cover a building site, elements hosted by other elements, zones as a super-class of spaces, storeys, buildings and sites, interfaces between adjacent zones/elements, a transitive property to infer implicit relationships between building zone siblings among other refinements. In this paper, we describe in detail the changes and the reasons for implementing them.

1 Background

Several research projects have dealt with transforming building data to open web standards for integration with linked open data such as product catalogues, Geographic Information Systems (GIS), unit conversion, material properties etc. The most general schema for describing buildings, Industry Foundation Classes (IFC) [1], has over several attempts been translated to Web Ontology Language (OWL), latest by Pauwels and Terkaj (2016) with an ontology called *ifcOWL* [2]. However, since IFC was not initially designed for being used on the web, the structure, size and complexity of *ifcOWL* makes it hard to use and extend in practice. For that particular reason (Pauwels and Roxin, 2016) suggested a post-processing of *ifcOWL* called *SimpleBIM*, which omitted all geometry and intermediate relation instances between objects [3].

The Building Topology Ontology (BOT)⁵ is a minimal ontology for defining relationships between the sub-components of a building [4]. It was suggested as an extensible baseline for use along with more domain specific ontologies following general W3C principles of encouraging reuse and keeping the schema no more complex than necessary [5]. Currently, the ontology is being developed by the *World Wide Web Consortium (W3C) Linked Building Data Community Group* (W3C LBD-CG), and this paper provides an overview of its current state and recent changes.

⁵ <https://w3id.org/bot#>

2 Initial version

The first version of the ontology presented at LC3 in July 2017 included 4 key classes and 5 object properties.

In Fig. 1 above the horizontal dashed line, the classes and properties of the ontology are illustrated. A building basically consists of the building itself and a number of storeys, rooms and building elements potentially related to each other. Object properties between the classes all have domains and ranges specified, meaning that classes will be automatically inferred by a reasoning engine, given that typed links between the class instances are available. The dataset, illustrated in Fig. 1 using the horizontal dashed line, shows the inferred classes. It is for instance inferred that since `<buildingA>` has a `bot:hasStorey` link to `<storey01>`, then `<buildingA>` is an instance of `bot:Building` and `<storey01>` is an instance of `bot:Storey`. This particular example is inferred from the domain and range of `bot:hasStorey`.

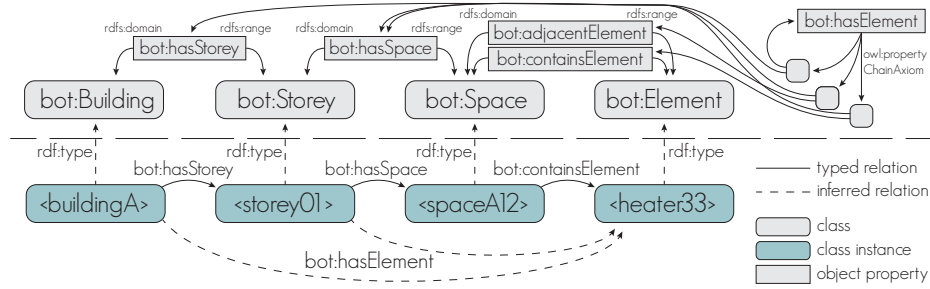


Fig. 1. BOT in the initial version. Typed links between class instances infer classes and the `bot:hasElement` property. Inferred relationships are illustrated with dashed arrows.

A `bot:hasElement` link can be inferred between some instance `?x` and an element `?e`: (a) whenever `?x` is linked by `bot:hasSpace` to some `?z`, itself linked to `e` by `bot:containsElement` or `bot:adjacentElement`, and (b) whenever `?x` is linked by `bot:hasStorey` to some `?z`, itself linked to `?e` by `bot:hasElement`. This inference capability is obtained using OWL property chain axiom.

3 Recent development

In the W3C LBD-CG, We gathered use cases and requirements for the BOT ontology and identified new competency questions that should be answered by a new version of the ontology. Fig. 2 illustrates the updated version of BOT. The following subsections list the new competency questions and how they have been taken into account in the new version of the BOT ontology.

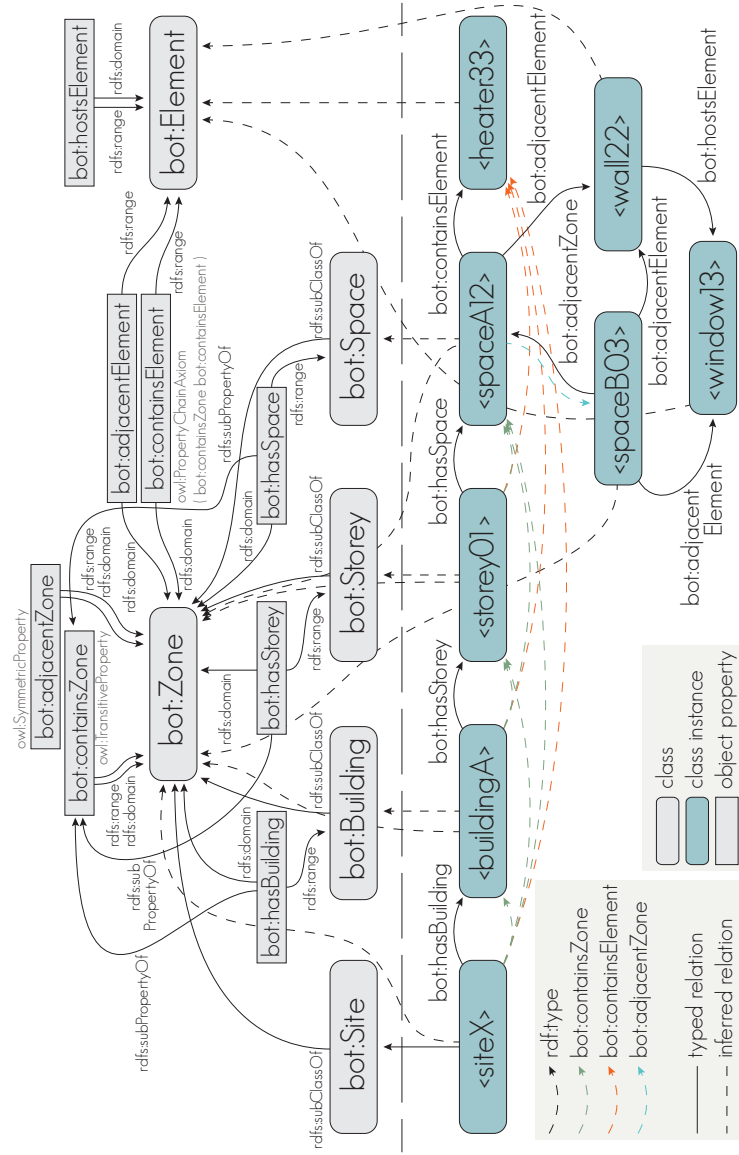


Fig. 2. BOT T- and A-Box.

3.1 Building site

New competency question: For Facilities Management (FM) purposes it is often the case that one property operator administers several buildings located at the same site. This is, for instance, the case for university campuses and hospitals. In such a case, a site and its relationship to the buildings it contains is needed.

Update on the ontology: Adding a new class `bot:Site` and an object property `bot:hasBuilding` with `rdfs:range` being a `bot:Building` to describe the relationship to the buildings contained in a site.

3.2 Domain definitions

New competency question: `bot:hasSpace`, `bot:adjacentElement` and `bot:containsElement` all had domains specified, meaning that something that has a space was necessarily inferred to be a storey. New use cases required that buildings also needed to contain spaces. Also, something that contained or had adjacency to elements was necessarily inferred to be a space. New use cases required that buildings and storeys also needed to contain or have adjacency to elements.

Update on the ontology: `bot:Site`, `bot:Building`, `bot:Storey` and `bot:Space` are all non-physical objects defining a spatial zone. A new class `bot:Zone` was added as a super-class of these. The domain of `bot:hasBuilding`, `bot:hasStorey` and `bot:hasSpace` was loosened to `bot:Zone`. A new common super-property of these object properties, called `bot:containsZone`, was added.

3.3 bot:hasElement

New competency question: The `bot:hasElement` property defined as an `owl:propertyChainAxiom`, stated that something that has a space which either contains an element or has an adjacency to one "has" the element. It further stated that if something has a storey that has such a space, then the storey also "has" the element. New use cases also required to loosen the semantics here, as in section 3.2.

Update on the ontology: The `bot:hasElement` property was changed to be valid in two situations: `bot:containsZone` followed by either `bot:adjacentElement` or `bot:containsElement`.

3.4 Hosted Elements

New competency question: The initial version of BOT did not allow for elements to be hosted by other elements. This relationship is necessary for describing situations where a window is for instance hosted by a wall, which is a fundamental part of a building's topology.

Update on the ontology: A new object property `bot:hostsElement` with domain and range being a `bot:Element` was added.

3.5 Zone connectivity

New competency question: When assessing architectural flow in a building, fire escape routes, etc., it is necessary to define a connection between zones.

Update on the ontology: `bot:adjacentZone` describes a relationship between two zones that share a common interface. With this super-property one can define more specific zone relationships stating whether there is a direct (sharing a door), indirect (sharing a wall) or maybe an open connection between the zones. This property further enables the aggregation of zones; for instance to group architectural zones into a fire cell. In this regard `bot:containsZone` can further be used to subdivide an architectural zone into sub-zones. Fig. 3 illustrates these new concepts.

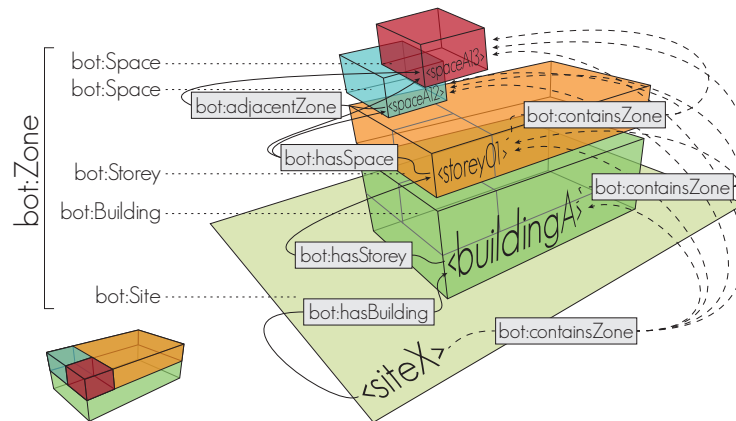


Fig. 3. BOT zone connectivity.

3.6 Interfaces

New competency question: For heat loss calculations, thermal simulations and other applications it is necessary to qualify the connection between elements or zones. A wall can cover several zones, but when defining the heat transfer area, only the shared surface between the zone and the element is of interest. BOT did not cover this representational need.

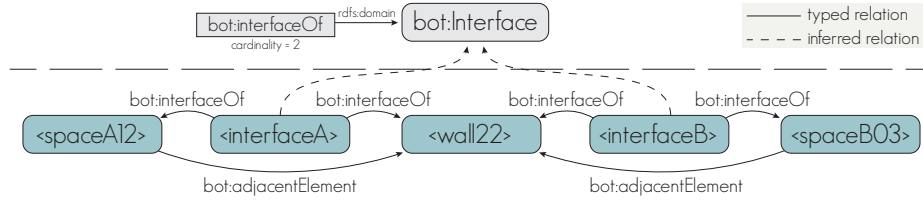


Fig. 4. BOT interfaces T- and A-Box.

Update on the ontology: A new class `bot:Interface` qualifies zone and element connectivity, i.e. the surface where two building elements, two zones or a building element and a zone meet. The interface is assigned to exactly two instances of either type `bot:Element` or `bot:Zone` by the object property `bot:interfaceOf`. Fig. 5 and 4 illustrate how to qualify the two separate adjacencies between `<spaceA12>` / `<wall122>` and between `<spaceB03>` / `<wall122>`. The same approach can for example be used to qualify a relationship between a pipe segment and the individual zones and wall elements it shares common interfaces with. These concepts are adaptations of the *Systems and Connections* pattern as defined in [6].

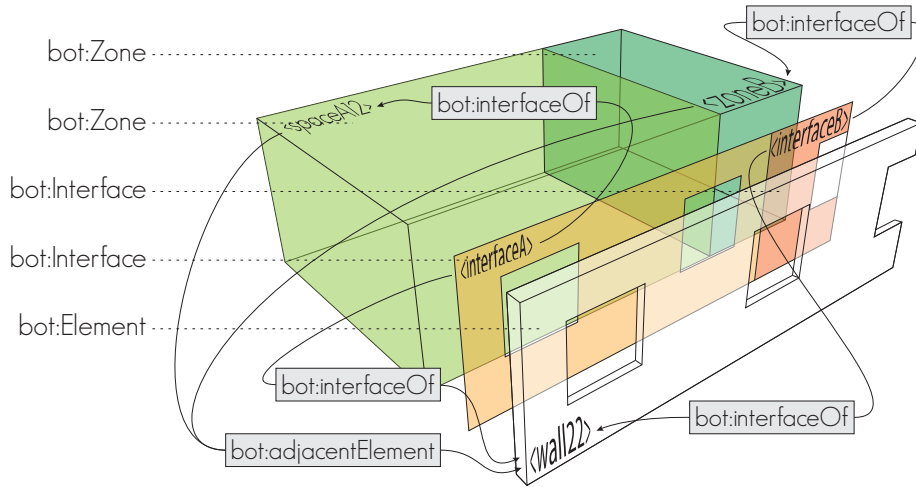


Fig. 5. BOT interfaces used to quantify each relationship between the zones and a wall which they have a shared adjacency to.

4 Conclusions and Future Work

This work provides an overview on the latest revisions and updates made to the initial version of the Building Topology Ontology (BOT) [4]. The supplementary classes and object properties enable the BOT ontology to answer six new competency questions: (1) how to define a building site, (2 & 3) how to enable transitivity when querying for either a zone of a zone or the elements that a zone "has", (4) how to have elements hosting other elements, (5) how to define adjacencies between zones (6) how to define interfaces between zone/zone, element/element or zone/element .

General development of use cases where BOT is used along with other domain ontologies is on the agenda for the W3C LBD-CG. Individual ontologies for geometry, products and properties are being developed in domain working groups, and these are all being aligned with BOT.

Implementations with existing BIM tools for extending with linked open data on the web is also on the agenda.

Acknowledgements

Special thanks to the NIRAS ALECTIA Foundation and Innovation Fund Denmark for funding.

References

1. Thomas Liebich and Jeffrey Wix. Highlights of the development process of industry foundation classes. In *Proceedings of the CIB W78 Conference*, volume 18, pages 1–18, Vancouver, Canada, May 1999.
2. Pieter Pauwels and Walter Terkaj. EXPRESS to OWL for construction industry: Towards a recommendable and usable ifcOWL ontology. *Automation in Construction*, 63:100–133, 2016.
3. Pieter Pauwels and Anna Roxin. SimpleBIM : From full ifcOWL graphs to simplified building graphs. In *Proceedings of the 11th European Conference on Product and Process Modelling (ECPM)*, pages 11–18, Limassol, Cyprus, September 2016. CRC Press.
4. Mads Holten Rasmussen, Pieter Pauwels, Christian Anker Hviid, and Jan Karlshøj. Proposing a Central AEC Ontology That Allows for Domain Specific Extensions. In *Lean and Computing in Construction Congress (LC3) - Joint Conference on Computing in Construction (JC3)*, volume 1, pages 237–244, Heraklion, Greece, 2017.
5. Bernadette Farias Lóscio, Caroline Burle, Newton Calegari, Annette Greiner, Antoine Isaac, Carlos Iglesias, and Carlos Laufer. Data on the Web Best Practices. W3C Recommendation, W3C, January 31 2016.
6. Maxime Lefrançois. Planned ETSI SAREF Extensions based on the W3C&OGC SOSA/SSN-compatible SEAS Ontology Patterns. In *Proceedings of Workshop on Semantic Interoperability and Standardization in the IoT, SIS-IoT*, pages 1–8, Amsterdam, Netherlands, July 2017.